

VU Research Portal

Frequency comb laser spectroscopy in the vacuum-ultraviolet region

Zinkstok, R.T.; Witte, S.; Ubachs, W.M.G.; Hogervorst, W.; Eikema, K.S.E.

published in

Physical Review A. Atomic, Molecular and Optical Physics
2006

DOI (link to publisher)

[10.1103/PhysRevA.73.061801](https://doi.org/10.1103/PhysRevA.73.061801)

document version

Publisher's PDF, also known as Version of record

[Link to publication in VU Research Portal](#)

citation for published version (APA)

Zinkstok, R. T., Witte, S., Ubachs, W. M. G., Hogervorst, W., & Eikema, K. S. E. (2006). Frequency comb laser spectroscopy in the vacuum-ultraviolet region. *Physical Review A. Atomic, Molecular and Optical Physics*, 73(6). <https://doi.org/10.1103/PhysRevA.73.061801>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal ?

Take down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

E-mail address:

vuresearchportal.ub@vu.nl

Frequency comb laser spectroscopy in the vacuum-ultraviolet region

Roel Th. Zinkstok, Stefan Witte, Wim Ubachs, Wim Hogervorst, and Kjeld S.E. Eikema*

Atomic, Molecular and Laser Physics Group, Laser Centre Vrije Universiteit De Boelelaan 1081, 1081 HV Amsterdam, the Netherlands

(Received 16 December 2005; published 9 June 2006)

We demonstrate that the output of a frequency comb laser can be amplified and upconverted to the vacuum ultraviolet (vuv) in a gaseous medium while its phase coherence is maintained to a high degree ($< \frac{1}{30}$ of a vuv cycle). The produced vuv pulses are well suited to perform frequency comb spectroscopy with sub-MHz accuracy, which is experimentally verified using a Ramsey-type quantum interference scheme to excite a transition in xenon at 125 nm. The achieved resolution constitutes an improvement of six orders of magnitude compared to previous demonstrations of frequency domain quantum interference in this wavelength range.

DOI: [10.1103/PhysRevA.73.061801](https://doi.org/10.1103/PhysRevA.73.061801)

PACS number(s): 42.62.Eh, 32.80.Qk, 39.30.+w, 42.65.Ky

Frequency comb devices based on mode-locked lasers at infrared wavelengths have led to a dramatic progress in fields such as ultrahigh precision frequency metrology [1,2], optical clocks [3,4], and ultrafast laser science [5]. For precision spectroscopy, a frequency comb laser generally acts as a phase-coherent link between the radio frequency of an atomic clock and the optical frequency of a stabilized narrow-band continuous wave (cw) laser used for the actual spectroscopy. However, many atomic transitions (in, e.g., helium and hydrogenlike ions) that are of interest for testing fundamental theories such as quantum electrodynamics, require excitation with vacuum ultraviolet (vuv) and extreme ultraviolet (xuv) radiation. Suitable narrow-band-width cw sources hardly exist at such short wavelengths [6].

New measurement schemes based on the excitation of atomic transitions with phase-locked pulse sequences [7–11] may provide a solution. No cw laser is required anymore, while frequency upconversion through harmonic generation is facilitated by the high peak intensity of the pulses. Such upconversion has recently been demonstrated with unamplified frequency comb lasers, using a gas jet inside an external enhancement cavity [12,13]. Radiation down to a wavelength of 60 nm at a 112 MHz repetition rate [12] was generated, albeit at relatively low power per pulse, and phase coherence was only confirmed at 266 nm through comparison with the third harmonic generated in crystals. In general, degradation of the pulse-to-pulse phase stability in the upconversion process is a potential cause for concern, due to the interaction of the required gaseous nonlinear medium with such high intensity laser pulses: the harmonic generation process itself [14] as well as competing ionization effects [15] will adversely affect the phase coherence. Previous experiments in the xuv spectral range have qualitatively shown a certain degree of temporal [16,17] and spatial coherence [18], by upconverting two replicas of a single amplified pulse and recording the resulting interference patterns on a charge-coupled device (CCD) camera. Similarly, frequency domain studies of the phase coherence have also been reported, using pulse pairs created with an interferometer [19,20] or a birefringent crystal [21]. However, in all these experiments the pulse delay could only be varied on a ~ 100 fs time scale, while the

phase difference between the pulses could not be measured. As a result, the spectral resolution was limited in all cases to the THz range, which is still far below the requirements of precision spectroscopy.

In this Rapid Communication we demonstrate that frequency comb spectroscopy can be performed in the vuv with sub-MHz accuracy, through an experiment on xenon at 125 nm. The obtained resolution is six orders of magnitude better than demonstrated so far at vuv and shorter wavelengths [19]. This is accomplished using pulse pairs, which are selected from a frequency comb laser with a variable delay, then individually amplified, and finally frequency-upconverted in a gaseous medium. This approach allows extension to much shorter wavelengths in the future, with an adjustable resolution by changing the pulse delay.

The measurement principle with pulses is based on quantum interference between the contributions of multiple excitation pulses, which give rise to an oscillation in the atomic excitation probability as a function of time delay T and phase difference $\Delta\varphi$ between consecutive pulses [22,23]. From the Ramsey-like interferogram that is obtained when scanning either T or $\Delta\varphi$, the absolute transition frequency can, in principle, be retrieved. In the frequency domain, this corresponds to scanning the repetition frequency f_{rep} or the carrier-envelope offset frequency f_{CEO} , respectively, thus moving all the modes in the comb laser spectrum. A maximum in the excitation probability occurs when one of the comb modes coincides with the transition frequency. Using this approach, the resolution is no longer determined by the bandwidth of the individual laser pulses, but rather by the duration of the pulse train and the phase coherence between the constituent pulses.

The source of phase-coherent pulses for the experiments described in this Communication is an 11 fs Kerr-lens mode-locked frequency comb laser referenced to a global positioning system (GPS)-disciplined Rb atomic clock (Stanford Research Systems PRS10). Two electro-optic pulse pickers are used to select either one pulse, two pulses separated by an integer number of oscillator roundtrip times, or a pulse train consisting of up to six pulses. These are injected into a multipass Ti:sapphire amplifier that boosts the power to 25 μJ per pulse while clipping the spectrum to a width of about 0.7 nm centered around 750 nm, to ensure that the light is resonant with only one xenon transition. Subsequently, the pulses are frequency doubled in a β -barium borate (BBO)

*Electronic address: kjeld@nat.vu.nl

fringes: ideally, the six-pulse train for example should yield about 11.5 MHz wide fringes, while the measured width is 16.9 MHz. Furthermore, intensity variations in the pulse train are a cause for concern as the phase of harmonics generated in a gas, might be influenced by processes such as ionization and dissociation that create a time dependent refractive index [21]. Pulse intensity jitter can then lead to differences in the degree of ionization of the harmonic gas, possibly causing detrimental phase fluctuations that do not occur when crystals are used [9]. Although the presence of high-contrast interference fringes in Fig. 2 demonstrates that such phase fluctuations are not very large in the third harmonic generation (THG) process in a gas these effects are difficult to measure quantitatively in longer pulse trains.

A simple solution that enables the determination of such unknown phase shifts without loss of resolution is to use pulse pairs instead of longer pulse trains. The advantage of using two pulses is that phase shifts between the pulses caused by the amplifier system can be measured with high accuracy [9], and that phase shifts in the THG process will be visible as a simple shift of the interference pattern. Note that the frequency resolution of a pulse pair spaced by, e.g., 67 ns is similar to what can be obtained with a pulse train of six pulses spaced by 13.4 ns. This is demonstrated in Fig. 2(b), where a series of pulse pair measurements with delays ranging from 13.4 to 67 ns is shown. The narrowest resonance that is observed has a full width at half maximum (FWHM) of 7.5 MHz, which is a 13-fold improvement compared to any other measurement performed so far at such short wavelengths using nanosecond pulsed lasers [24] or cw lasers [6]. The frequency resolution demonstrated in this measurement is 3×10^{-9} , constituting an improvement of about six orders of magnitude compared to previous experiments using Michelson interferometers and ultrashort pulses [19,20]. The decrease in fringe contrast with increasing T as seen in Fig. 2(b) can be explained with a model that includes the measured pulse intensity ratios, the lifetime of the upper state, and the Doppler width, the latter being the dominant factor. By investigating transitions to longer-lived states, and reduction of the Doppler width through, e.g., cooling techniques and confinement in an ion trap, much narrower fringes can, in principle, be measured with high contrast using this method. But even from a relatively low-contrast interferogram as shown in the bottom panel of Fig. 2(b) the fringe position can be extracted reliably, since the rapid sine wave oscillation allows fitting of many periods simultaneously.

The control over the measurement resolution by changing the pulse delay can be used to overcome the ambiguity in the determination of the right mode when absolute frequencies are to be measured [9,11]. An initial measurement with sufficiently short time delay T allows identification of the mode by comparison with existing low-resolution data. Here we demonstrate [Fig. 2(b)] that the measurement accuracy can be improved by increasing T to zoom in on the transition, while keeping track of the previously determined excitation mode. This is illustrated by the dotted line in Fig. 2(b). Apart from the normal systematic effects in laser spectroscopy (e.g., Doppler shift and ac Stark shift), the amplifier phase shift error (6×25 mrad) together with the statistical fit un-

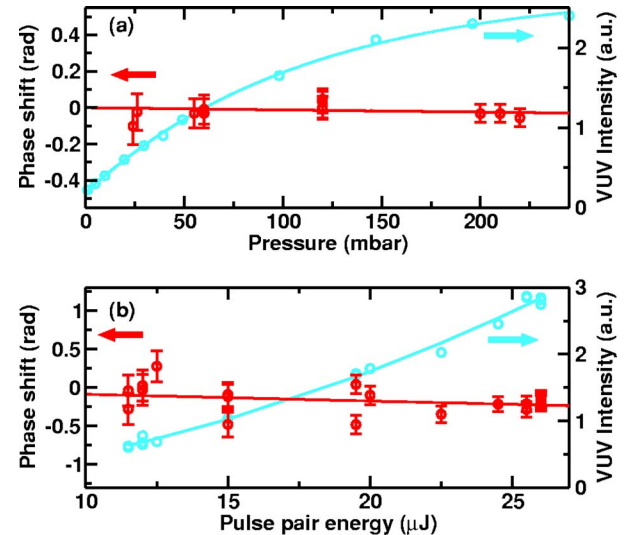


FIG. 3. (Color online) Dependence of the relative phase shift between the vuv pulses on the THG process in O₂. Measurements of the phase shift of the quantum interference signals in xenon (as shown in Fig. 2), using two vuv pulses (a) as a function of the O₂ pressure in the gas cell; (b) as a function of incident laser pulse energy (sum of the two pulses). The phase shift is set to zero at zero intensity and pressure. The light blue curves indicate the generated vuv intensity.

certainly amount to an error in the vuv of about 1 MHz for $T=13.4$ ns. As the pulse delay increases, the influence of the amplifier phase shifts is progressively reduced inversely proportional to T . For example, at $T=67$ ns the uncertainty due to phase shifts and the fitting procedure has improved to 270 kHz (1×10^{-10} accuracy). The absolute transition frequency has not been calibrated here, as no spectroscopic data with sufficient accuracy for mode identification exists at present for the studied xenon transition (in contrast to our previous experiment on krypton at 212 [9]). As this transition in itself is of no fundamental spectroscopic importance, no further efforts were undertaken to perform an initial calibration by traditional means.

However, if absolute frequency measurements are to be performed the possibility of a systematic phase shift caused by the THG process needs to be investigated precisely. We have done this by systematically varying the parameters relevant to THG, in particular the gas pressure and laser intensity. The xenon atoms are now used as high-resolution vuv phase detectors, by recording two-pulse interferograms with 13.365 ns time delay at various gas pressures and laser intensities. Figure 3 shows the retrieved phases when using oxygen (O₂) for THG. Linear fits to both curves yield slopes of -0.12 (0.29) mrad/mbar [corresponding to -1.5 (3.4) kHz/mbar at the vuv frequency] and -8.7 (5.8) mrad/μJ [-104 (70) kHz/μJ], respectively (1σ error bars). Hence, no real phase shifts are observed within $1/30$ of a vuv cycle, even though the vuv intensity changes by an order of magnitude and shows signs of saturation. We repeated these measurements using acetylene as the nonlinear medium, which already saturates at a pressure below 1 mbar, but displays a maximum THG efficiency at

10 mbar, comparable to O_2 at about 200 mbar. Also with acetylene, no phase shift is observed within the measurement resolution. This ensures that when a sufficiently long time delay between the pulses is used, a sub-MHz resolution can indeed be achieved.

In conclusion, we have demonstrated that frequency combs can be transferred to the vuv by harmonic up-conversion in a gas while distortion of the phase coherence between subsequent comb pulses is well within 1/30 of a vuv cycle. We used these vuv pulses to excite a 125 nm transition in xenon, showing that quantum interference is a powerful tool for high-resolution spectroscopy at vuv and shorter wavelengths, possibly even down to the soft-x-ray regime when a more powerful amplifier is used. In addition, separate pump pulses could be used to increase the

time delay between the vuv pulses, potentially improving the resolution to the kHz level. In the near future, we plan to perform measurements on the $1s^2 \rightarrow 1s2s$ two-photon transition at 2×120 nm in helium with a target accuracy of ~ 500 kHz, which would lead to two orders of magnitude improvement in the determination of the ground state Lamb shift [25]. Applying the technique of quantum interference spectroscopy to trapped ions may lead to the emergence of a new generation of ultra-precise clocks, operating in the xuv domain.

This project was financially supported by the Foundation for Fundamental Research on Matter (FOM), the Netherlands Organization for Scientific Research (NWO), and the EU Integrated Initiative FP6 program.

-
- [1] M. Fischer *et al.*, Phys. Rev. Lett. **92**, 230802 (2004).
 - [2] H. S. Margolis *et al.*, Science **306**, 1355 (2004).
 - [3] M. Takamoto, F.-L. Hong, R. Higashi, and H. Katori, Nature (London) **435**, 321 (2005).
 - [4] S. A. Diddams *et al.*, Science **293**, 825 (2001).
 - [5] M. Hentschel *et al.*, Nature (London) **414**, 509 (2001).
 - [6] K. S. E. Eikema, J. Walz, and T. W. Hänsch, Phys. Rev. Lett. **86**, 5679 (2001).
 - [7] R. Teets, J. Eckstein, and T. W. Hänsch, Phys. Rev. Lett. **38**, 760 (1977).
 - [8] M. Bellini, A. Bartoli, and T. W. Hänsch, Opt. Lett. **22**, 540 (1997).
 - [9] S. Witte, R. Th. Zinkstok, W. Ubachs, W. Hogervorst, and K. S. E. Eikema, Science **307**, 400 (2005).
 - [10] A. Marian, M. C. Stowe, J. R. Lawall, D. Felinto, and J. Ye, Science **306**, 2063 (2004).
 - [11] A. Marian, M. C. Stowe, D. Felinto, and J. Ye, Phys. Rev. Lett. **95**, 023001 (2005).
 - [12] C. Gohle *et al.*, Nature (London) **436**, 234 (2005).
 - [13] R. J. Jones, K. D. Moll, M. J. Thorpe, and J. Ye, Phys. Rev. Lett. **94**, 193201 (2005).
 - [14] H. J. Shin *et al.*, Phys. Rev. A **63**, 053407 (2001).
 - [15] P. B. Corkum, Phys. Rev. Lett. **71**, 1994 (1993).
 - [16] C. Lyngå *et al.*, Phys. Rev. A **60**, 4823 (1999).
 - [17] M. Bellini *et al.*, Phys. Rev. Lett. **81**, 297 (1998).
 - [18] R. Zerne *et al.*, Phys. Rev. Lett. **79**, 1006 (1997).
 - [19] M. Kovačev *et al.*, Phys. Rev. Lett. **95**, 223903 (2005).
 - [20] S. Cavalieri, R. Eramo, M. Materazzi, C. Corsi, and M. Bellini, Phys. Rev. Lett. **89**, 133002 (2002).
 - [21] P. Salières *et al.*, Phys. Rev. Lett. **83**, 5483 (1999).
 - [22] N. F. Ramsey, Phys. Rev. **78**, 695 (1956).
 - [23] M. M. Salour, Rev. Mod. Phys. **50**, 667 (1978).
 - [24] Th. A. Paul and F. Merkt, J. Phys. B **38**, 4145 (2005).
 - [25] K. S. E. Eikema, W. Ubachs, W. Vassen, and W. Hogervorst, Phys. Rev. A **55**, 1866 (1997).